



3 YEARS WARRANTY
PARTS & LABOR

SPIKA NG 125

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 37" TO 39"



	24 H	70°F/21°C 50°F/10°C	90°F/32°C 70°F/21°C	lbs (Kg)	in (mm)	in (mm)	SPIKA HALF DICE 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 125 A		146 (66)	114 (52)	44.1 (20)	Width 21" (535)	Width 24" (620)	SPIKA FULL DICE 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 125 W		146 (66)	114 (52)		Depth 23" (595)	Depth 26" (660)	
					Height* 31" (795)	Height 36" (920)	

* WITH LEGS 35"/37"

ACCESSORIES

INCLUDED



WATER OUTLET HOSE



4 HEIGHT ADJUSTABLE LEG KIT



SCOOP



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K




10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

TECHNICAL SCHEME

SPIKA NG 125

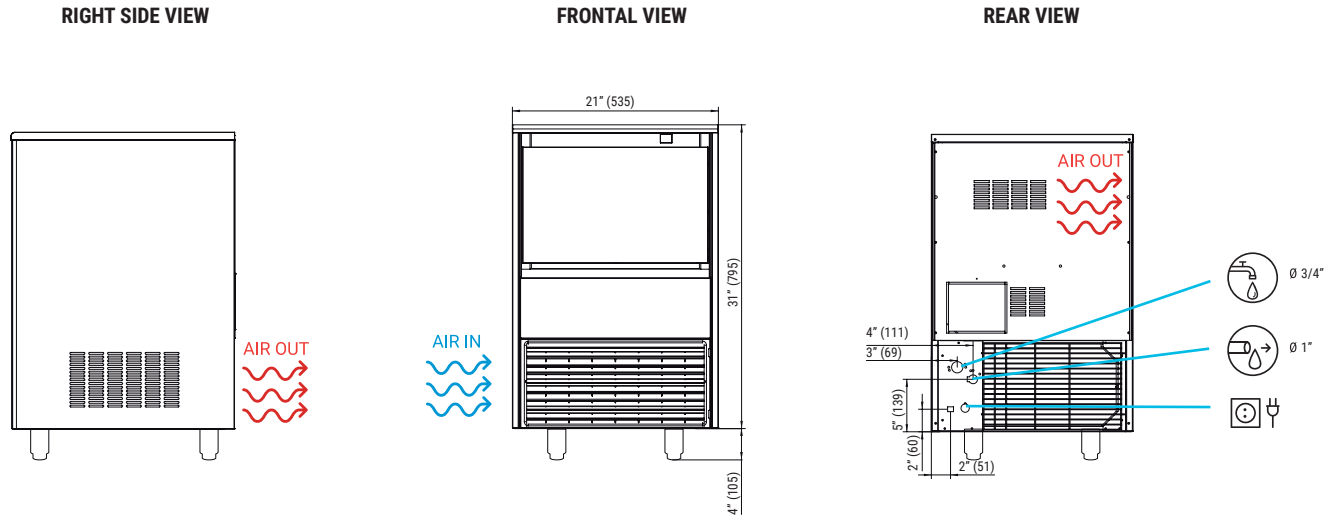

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

75/150 Ice cubes/cycle

V	Hz	ph
115	60	1N

24 H	FULL DICE SPIKA NG 125 AIR COOLED					24 H	FULL DICE SPIKA NG 125 WATER COOLED				
	50° 10°	60° 15°	70° 21°	86° 30°	50° 10°		60° 15°	70° 21°	86° 30°		
50° 10°	153	145	134	119	153	145	134	119			
68° 21°	146	139	127	111	146	139	127	111			
90° 32°	130	123	114	102	130	123	114	102			
109° 43°	108	97	87	74	108	97	87	74			

MODELS

MODEL	ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs (Kwh/100 lbs) 90°F / 70°F	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)			
SPIKA NG 125 A	3,115	913	460	14/1.5	3	15	7.75	25.5	5.9	2,429	712	115	134
SPIKA NG 125 W	3,115	913	460	14/1.5	3	15	5.66	113.8	25.9	2,429	712	115	134



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

