



**3 YEARS WARRANTY**  
**PARTS & LABOR**

# SPIKA NG 285

115 V / 60 Hz

## SELF-CONTAINED ICE CUBE MACHINE

### FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 37" TO 39"



	24 H	70°F/21°C	50°F/10°C	90°F/32°C	70°F/21°C	<b>STOCK</b>	in (mm)	in (mm)	<b>SPIKA HALF DICE</b> 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 285 A		<b>323</b> (146)		<b>267</b> (121)		<b>99</b> (45)	Width <b>30"</b> (762) Depth <b>30"</b> (762) Height* <b>33"</b> (838)	Width <b>33"</b> (835) Depth <b>33"</b> (835) Height <b>38"</b> (970)	<b>SPIKA FULL DICE</b> 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 285 W		<b>323</b> (146)		<b>267</b> (121)					

\* WITH LEGS 37"/39"

### ACCESSORIES

#### INCLUDED



WATER OUTLET HOSE



4 HEIGHT ADJUSTABLE LEG KIT



SCOOP

#### NOT INCLUDED (OPTIONAL)



11" FILTER  
ANTI-LIMESCALE + ANTI-CHLORINE  
**CS-111 K**




11" REPLACEMENT CARTRIDGE  
ANTI-LIMESCALE + ANTI-CHLORINE  
**CS11**



SCALE KLEEN

# TECHNICAL SCHEME

SPIKA NG 285

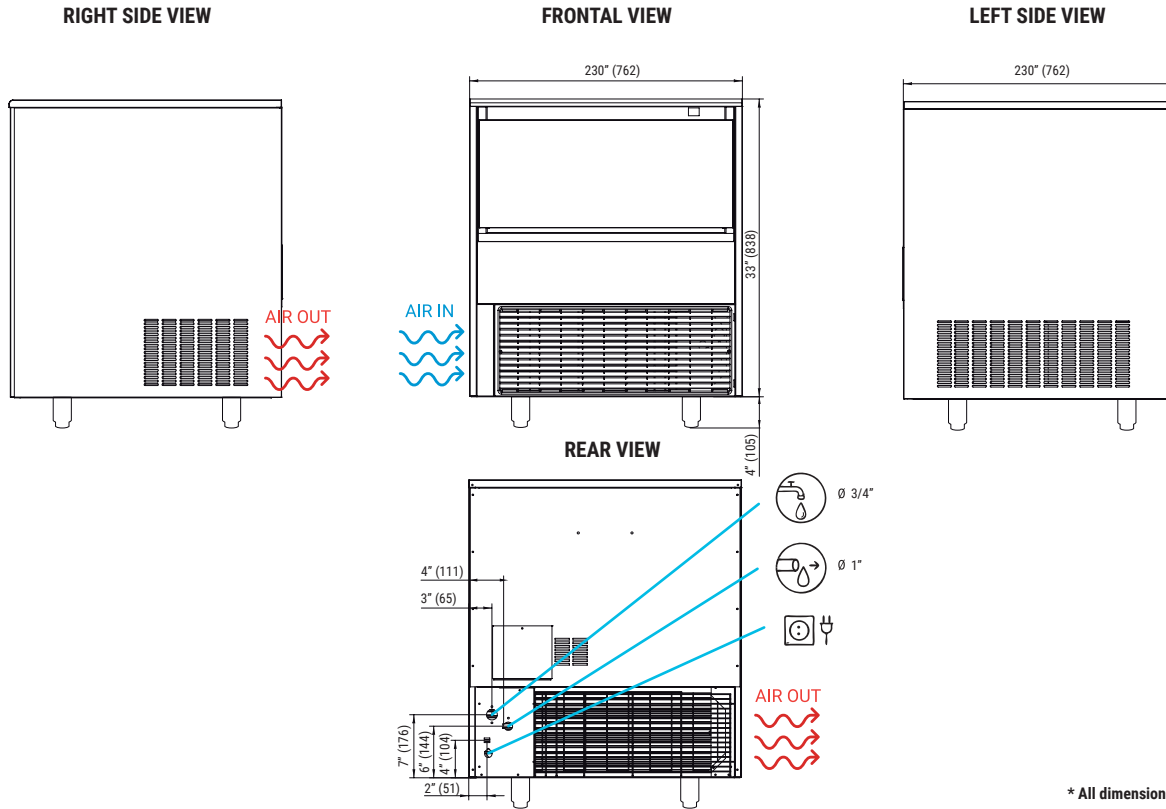

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

### PRODUCTION (LBS) 60Hz


±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) / 87 psi (6 bar)

144/288 Ice cubes/cycle



V	Hz	ph
115	60	1N



FULL DICE  
SPIKA NG 285 AIR COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	337	318	300	280
10°				
68°	323	307	283	265
21°				
90°	305	290	267	242
32°				
109°	283	266	245	218
43°				

FULL DICE  
SPIKA NG 285 WATER COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	337	318	300	280
10°				
68°	323	307	283	265
21°				
90°	305	290	267	242
32°				
109°	283	266	245	218
43°				

## MODELS

SPIKA NG 285 A

SPIKA NG 285 W

	ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)			
SPIKA NG 285 A	7,681	2,251	780	14/1,5	3	15	7,21	22,4	16,4	5,156	1,511	185	214
SPIKA NG 285 W	7,681	2,251	780	14/1,5	3	15	5,26	117,3	61,8	5,156	1,511	185	214



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com



SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS  
ON COMPRESSOR &  
EVAPORATOR  
Read our warranty policy  
to know more about  
limitations and exclusions

