

**3 YEARS**  
WARRANTY  
PARTS & LABOR














## ALFA NG 265 115 V / 60 Hz

### SELF-CONTAINED ICE CUBE MACHINE

#### FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALCLIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 4.1" TO 0.2"



	 24 H	 70°F/21°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 <b>STOCK</b>	 in (mm)	 in (mm)	
		lbs (Kg)		lbs (Kg)		lbs (Kg)			
ALFA NG 265 A		260 (118)		202 (92)		132 (60)	Width 28" (715)	Width 31" (790)	<b>ALFA 17/21cc</b> 1.5" (W) x 1" (D) x 1.2" (H) 39 mm (W) x 27 mm (D) x 30 mm (H) Average dimensions
ALFA NG 265 W		275 (125)		216 (98)			Depth 28" (700)	Depth 30" (770)	
							* WITH LEGS 45"/47"		

#### ACCESSORIES

##### INCLUDED




##### NOT INCLUDED (OPTIONAL)



# TECHNICAL SCHEME

ALFA NG 265

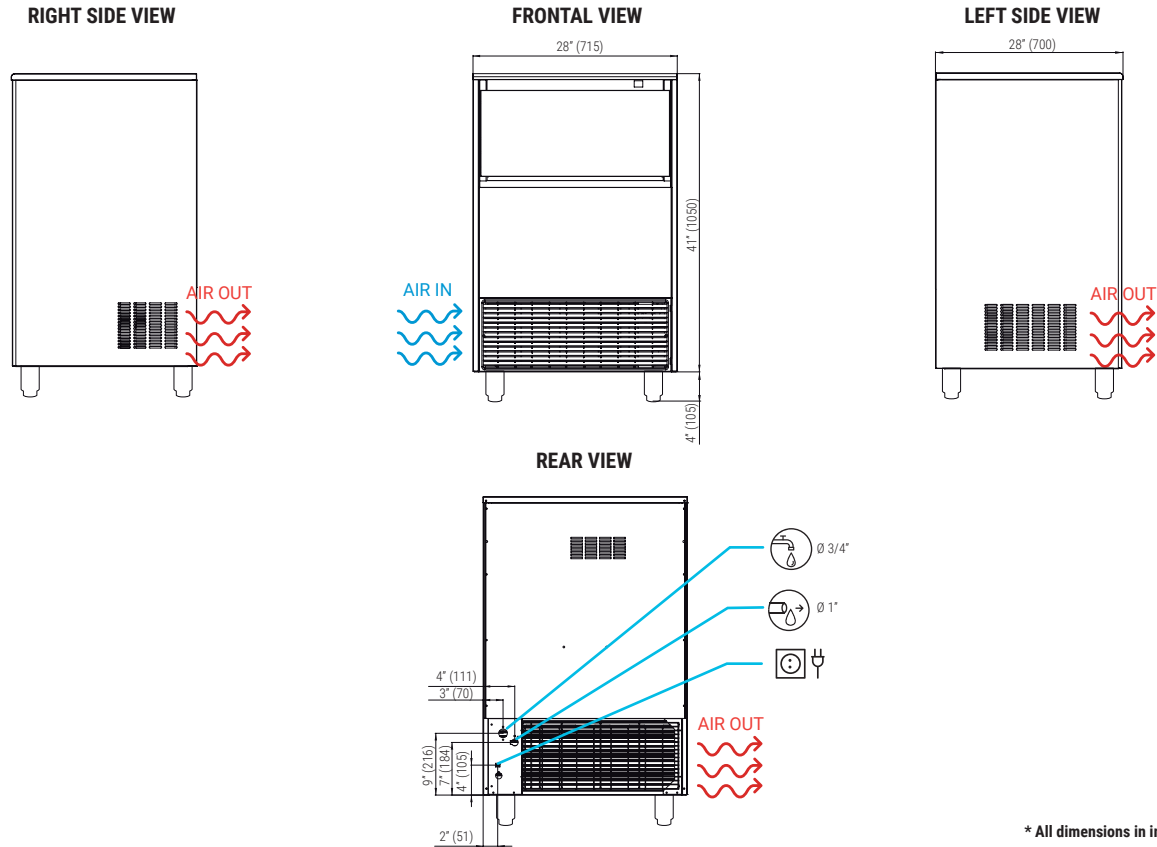

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz


±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

72 Ice cubes/cycle



V	Hz	ph
115	60	1N



ALFA NG 265 AIR COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	274	256	236	212
10°				
68°	260	242	224	200
21°				
90°	236	220	202	178
32°				
109°	204	188	170	140
43°				



ALFA NG 265 WATER COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	290	271	252	227
10°				
68°	275	256	240	214
21°				
90°	250	233	216	190
32°				
109°	216	199	182	150
43°				

## MODELS

	ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
ALFA NG 265 A	10,639 3,118	1,150	14/1.5 3	20	9.3	53 22	8,373 2,454	209	225
ALFA NG 265 W	10,639 3,118	1,150	14/1.5 3	20	8.8	194 85	8,373 2,454	209	225



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com



SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS  
ON COMPRESSOR &  
EVAPORATOR  
Read our warranty policy  
to know more about  
limitations and exclusions

